HP LaserJet MFP M440 series



Count on legendary HP performance and reliability at an affordable price.

Surpass your office printer expectations with the speed, quality, and efficiency of HP Laser Jet office printers.



HP LaserJet MFP M440n



HP LaserJet MFP M440dn



HP LaserJet MFP M440nda

A printer to handle your printing volume needs

- Simplify workflows with automatic paper-handling solutions, efficient scan solutions, and copying.^{1,2}
- Conserve resources with automatic two-sided printing and copying—consume up to 50% less paper.
- Capture both sides of the page with ease, using the 100-sheet reversing automatic document feeder.
- Launch tasks at the device—streamline copying; capture a two-sided ID; and darken, enlarge, or reduce images.

Reliable and productive


- Bring together remote monitoring and shared resources to help optimize your print environment.³
- Identify new devices and gain insight into printing with HP Web Jetadmin remote discovery and monitoring.³
- Easily set up, print, and share printing resources with built-in Ethernet networking.

Get great value from your office printer

- Help maximize value and minimize budget impact with an attractive purchase price and affordable running costs.
- Help save budget and put affordable MFP performance to work for your business.
- Help protect your investment and get affordable running costs, using Original HP toner cartridges.

Dynamic security enabled printer. Only intended to be used with cartridges using an HP original chip. Cartridges using a non-HP chip may not work, and those that work today may not work in the future. Learn more at http://www.hp.com/go/learnaboutsupplies

Product walkaround

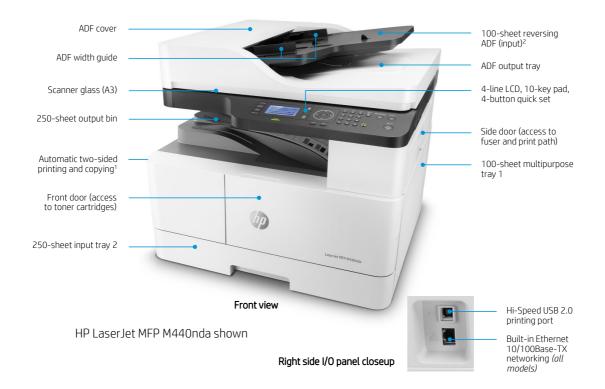

Series at a glance







	HP LaserJet MFP M440n	HP LaserJet MFP M440dn	HP LaserJet MFP M440nda
Product number	8AF46A	8AF47A	8AF48A
Print and copy speeds ³	Up to 24 pages per minute; Up to 24 copies per minute <i>(all models)</i>		
Duplex printing	Manual	Automatic (default ⁴)	Automatic (default ⁴)
Scan speeds, simplex ⁵	A4: Up to 33 images per minute (ipm) (black and colour); A3: Up to 21/14 ipm (black/colour)		
100-sheet reversing ADF ²	Optional	Optional	✓
ID copy, book copy, N-up, reduce/enlarge	✓	✓	\checkmark
Input capacity	Standard: 350 sheets (Multipurpose tray 1: Up to 100 sheets; Tray 2: Up to 250 sheets) <i>(all models)</i> Maximum: 600 sheets (with purchase of optional 250-sheet tray 3 ⁶) <i>(all models)</i>		
Output capacity	250 sheets (all models)		
Long-life supplies ⁷	Cartridge yield (A/X): Black: ~7,400/13,700 pages; Original HP Imaging Drum: ~80,000 pages (all models)		
Job accounting, PIN printing, remote management, and scan to email/SMB/FTP	✓	\checkmark	\checkmark

¹ Automatic two-sided printing is standard on the HP LaserJet MFP M440 dn and nda models only. Automatic two-sided copying is standard on the M440nda model only. ² Reversing automatic document feeder is standard on the HP LaserJet MFP M440nda model only. It requires a separate purchase and Care Pack installation for the HP LaserJet MFP M440 n and dn models. ³ Measured using ISO/IEC 24734 and excludes the first set of test documents. For more information, see hp.com/go/printerclaims. Exact speed varies depending on the system configuration, software application, driver, and document complexity.

⁴ All Laser Jet Introductory Toner cartridge (yield ~4,000 pages) and one HP Original Imaging Drum (yield ~80,000 pages).

HP Services

Downtime can have serious consequences, so HP provides support beyond the standard warranty. You benefit from reduced risk, maximized uptime, predictable service delivery and no unbudgeted repair costs.

Choose from:

Optimized Care (optimum performance and stability):

4 hour Onsite Support, Maintenance Kit Replacement Service, Installation with Network Configuration Service

Standard Care (high level of uptime):

Next Business Day Onsite Support, Maintenance Kit Replacement Service, Installation with Network Configuration Service

Basic Care (minimum recommended support): Next Business Day Onsite Support

4 hour Onsite Support:

Onsite support within four hours after a service call received within the coverage window

Next Business Day Onsite Support:

Onsite service the next business day after the service call is received

Maintenance Kit Replacement Service:

Onsite replacement of your printer's maintenance kit including parts, materials, and labor

Installation with Network Configuration Service:

Assembly, network configuration, and basic administrator familiarization. For more information about HP Care Pack, HP Contractual, or HP Managed Print Services, visit hp.com/go/printservices







HP Care Pack

Top features

U	Product 8AF46A 8AF47A 8AF48A	HP LaserJet MFP M440n HP LaserJet MFP M440dn HP LaserJet MFP M440nda
nt	Supplies CF257A W1335A W1335X	HP 57A Original LaserJet Imaging Drum (80,000 pages) HP 335A Black Original LaserJet Toner Cartridge (7,400 pages) HP 335X High Yield Black Original LaserJet Toner Cartridge (13,700 pages)
	HP Care Pac U9JT4E U9JT5E U9JT6E U9JT7E U9JT8E	ks HP 3 year Next Business Day w/DMR Service HP 4 year Next Business Day w/DMR Service HP 5 year Next Business Day w/DMR Service HP 3 year 4 hour 9x5 w/DMR Service HP 4 year 4 hour 9x5 w/DMR Service

HP 5 year 4 hour 9x5 w/DMR Service U9JU3PE HP 1 year Post Warranty Next Business Day w/DMR Service

U9JU4PE HP 1 year Post Warranty 4 hour 9x5 w/DMR Service

Protect your investment with HP Care Pack. Let HP certified engineers resolve your technical issues. For more details on HP Care Pack, go to hp.com/go/cpc

Paper

U9JT9E

Contact HP via phone: Asia: 65 6253 8500

Solutions

HP Web Jetadmin: hp.com/go/wja HP Universal Print Driver: hp.com/go/upd HP Imaging and Printing Security Center: hp.com/go/ipsc

HP LaserJet MFP M440 series

Biology	Model	HP LaserJet MFP M440n	HP LaserJet MFP M440dn	HP LaserJet MFP M440nda				
Print Description Print Speep not speed Back (Ad. normal: Up to 24 pum; Back (Bdt) Back (Ad. normal: Up to 24 pum; Back (Bdt) Print speed Back (Ad. normal: Up to 24 pum; Back (Bdt) Back (Ad. normal: Up to 24 pum; Back (Ad. normal: Up to 24 pum; Back (Ad. normal: Up to 24 pum; Back (Ad. normal: Up to 13 pum; Back (Ad. normal: Up			8AF47A	8AF48A				
Duples print Buck Marken and Sec. 2014. Sec								
Option Pack (AL, normal: It in to 24 ppm; Black (BL, normal: It in to 24 ppm; Black (BL, normal: It in to 24 ppm; Black (AL, normal: It in to 24 ppm; Black (AL, normal: It in to 24 ppm; Black (BL, normal: It in to24 ppm; Black (BL, normal: It in to24 ppm; Black (BL, normal: It			1					
Image: Sec: Constraints Black (Ap, normality bits 24 prime Black (Better, Sec: Constraints), bits 24 prime Black (Ad, duplice), bits of prime Black (Ad, duprime Black), bits of prime Black (Ad, duplice), bits of prime Bla			Automatic (standard)					
herit is brinnen herit en soution Perior controller Perior controll	Print speed	normal): Up to 24 ppm Black (A3, normal): Up to 13 ppm; Black (letter,	Black (A3, normal): Up to 13 ppm; Black (letter,	normal): Up to 24 ppm; Black (A4, duplex): Up to normal): Up to 13 ppm; Black (A3, duplex): Up to 8				
Print resultation Black (best by Lot 1200 x 1200 x): 200 x): 200 x): Black (from all Up to 600 x 600 dp): Black (from lines) Up to 1200 x 1200 x): 200 up) Print restriction 2 (back) Constraining Print Restriction Print Restriction Standard Infinity Print Restriction Print Restriction Print Restriction Standard Infinity Print R	First page out							
Part or mindler 2 / Exists 2 / Ex	Print technology	Laser						
number 2 400x00 File Constraints File File File File File File File File	Print resolution	Black (best) Up to 1200 x 1200 dpi; Black (norm	nal) Up to 600 × 600 dpi; Black (fine lines) Up to 1	200 x 1200 dpi				
Image by PCU0 + 5 Private consistent of the second of t	Print cartridges number	2 (black)						
PP Web Audumn PP Web Audumn Stan Type: Flatbed: Technology: Digital-CMOS Image Sensors (D=CIS) Type: Flatbed: AUF: Technology: Digital-CMOS Stan speed Enhanced: Up to 43 form/Stavp): Up to 33 form/Stavp): Up to 35 form/Stavp): Up to	languages	PCL6, PS						
Stan Type Flatbad. Technology: Digital-CHOS Image Sensors ID-CIS Image Sen		HP Web Jetadmin						
Jamma Body Stansgeed Type: Haudace, Ref Wooggraphic Voids and Stansgeed Image Sensors (D.C.S) Scan seed Normal LAP, Lip to 33 gm/30x, Vip, 10 = 33 gm/30x/01 Scan Sensored Normal LAP, Lip to 33 gm/30x, Vip, 10 = 33 gm/30x/01 Scan seed Normal LAP, Lip to 33 gm/30x, Vip, 10 = 33 gm/30x/01 Fibanced Up to 4800 × 4800 cp; Nurdavare: Up to 600 × 600 dpi; Opkicat. Up to 600 dpi; Opkicat. Up to 600 cpi; Amma Scan Sensore Fibanced 297 x 432 mm, Scan Sensore Scan New Rabbed 297 x 432 mm, Scan Sensore Fibanced 297 x 432 mm, Scan Sensore Fibanced 297 x 432 mm, Scan Sensore Scan Send Torgen No Pob JPEG, TIFF Fibanced 297 x 432 mm, Scan Sensore Fibanced 297 x 432 mm, Scan Sensore Scan Send Torgen No Copy, Book Copy, N-UP, Reduce/Enlarge Fibanced 297 x 432 mm, Scan Sensore Fibanced 297 x 432 mm, Scan Sensore Scan Send Torgen No Copy, Book Copy, N-UP, Reduce/Enlarge Fibanced 297 x 432 mm, Scan Sensore Fibanced 297 x 432 mm, Scan Sensore Scan Send Torgen No Copy, Book Copy, N-UP, Reduce/Enlarge Fibanced 297 x 432 mm, Scan Sensore Fibanced 297 x 432 mm, Scan Sensore Scan Send Torgen No Sensore Sensore No Sensore Sensore Fibanced 297 x 432 mm, Scan Sensore Scan Send Torgen Tife Sensore Fibanced 207 x 432 mm								
Sina misolularia Sina misolularia Sina misolularia Dipital sending Scan to E-mail: Send to FTP, Send to SMB; Local Address Book; SMTP over SL/TLS Features Scan Size Fatibad: 297 x 432 mm; ADF: 200 m; ADF: 2	Scan technology	Type: Flatbed; Technology: Digital-CMOS Image	Sensors (D-CIS)	Type: Flatbed, ADF; Technology: Digital-CMOS Image Sensors (D-CIS)				
Dipate anding standard Scan to E-mail; Send to FTP; Send to SMB; Local Address Book; SMTP over SL /TLS Color scanning Standard Yes Flatbed: 297 x 432 mm; ADF: 297 x 432	Scan speed	Normal (A4): Up to 33 ipm(b&w); Up to 33 ipm(c	color)					
Scan to E-mail: Send to FTP; Send to SMB; Local Address Book; SMTP over SSL/TLS Cider scanning Ves Cider sc	Scan resolution	Enhanced: Up to 4800 × 4800 dpi; Hardware: Up	p to 600 × 600 dpi; Optical: Up to 600 dpi					
Stan Star Pathed: 297 × 432 mm Pathed: 297 × 432 mm, ADF: 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 × 200 ×	Digital sending standard features	Scan to E-mail; Send to FTP; Send to SMB; Local	l Address Book; SMTP over SSL/TLS					
Scan file format Gopy Copies mark Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features Features	Color scanning							
Copy Copy Copier strature ID Copy, Book Copy, N-UP, Reduce/Enlarge First copy out Black (A4): As fast as 7.1 sec; Black (A4, Sleep): As fast as 21.6 sec; Black (letter): As fast as 7.1 sec; Black (letter; sleep): As fast as 21.6 sec; Max not copiers Copier restare 25 to 400% 25 to 400% 25 to 400% Copier settings: Text, Text/Photo, Photo, Map; Reduce/Enlarge scaling: 25 to 400%; Copy ety settings: T to 999; Connectivity Connectivity Darkness controls: 11 levels (Light, Normal, Dark); Collation: Yes (Limited): N-up: A3: 2/4/B/16-up: A4: 2/4/B-up Standard Connectivity Ill-Speed USB 2.0 Device, Ethernet 10/100 Base TX Writeless No Standard: 512 MB Processor speed Memory Standard: Du/100 Base TX Ethernet! Standard: 512 MB Processor speed Monty Y (V) Up to 50.000 pages per month; Recommended monthly page volume ⁶ ; 2000 to 5000 Poper handling Insu: Tray 1: 100 sheet; Tray 2: 50 sheet Du/10 to 205 Sheet Du/10 to 10 to 10 g/mF; Tray 2: 50 to 110 g/mF; Media types Page Handling Tray 1: 100 sheet; Tray 2: 260 to 110 g/mF; Tray 2: 148 x 210 to 297 x 354 mm; Differentione S60 x 563 x 505 x fm S60 x 563 x 505 x fm S60 x 563 x 505 x fm				Flatbed: 297 x 432 mm; ADF: 297 x 432 mm				
Corpie strant features ID Copy, Book Copy, N-UP, Reduce/Enlarge First copy out oppier resize Black (A4): As fast as 7.1 sec; Black (A4, sleep): As fast as 21.6 sec; Black (letter): As fast as 7.1 sec; Black (letter; sleep): As fast as 21.6 sec; Dire resize Copier resize 25 to 400%, Copy ety sectings: Edware so of copies 25 to 400%, Copy ety settings: To 1999; Darkness controls: 11 levels (Light, Norma), Dark); Collation: Yes (Limited); N-up: A3: 2/4/8/16-up; A4: 2/4/8-up Darkness controls: 11 levels (Light, Norma), Dark); Collation: Yes (Limited); N-up: A3: 2/4/8/16-up; A4: 2/4/8-up Connectivity Standard connectivity He-Speed USB 2.0 Device, Ethernet 10/100 Base TX Writeless No No No No Network Standard: 256 MB Standard: 512 MB Processor speed 600 Milz Up to 50.000 pages per month; Recommended monthly page volume ⁵ : 2000 to 5000 Upt to 205 Disets Up to 50.000 pages per month; Recommended monthly page volume ⁵ : 2000 to 5000 Pepunched Media weight Tray 1: 00 sheet, Tray 2: 250 sheet Up to 50.000 pages per month; Recommended monthly page volume ⁵ : 2000 to 5000 Pepunched Media weight Tray 1: 98 x 148 to 297 x 432 mm; Tray 2: 148 x 210 to 297 x 354 mm; 560 x 583 x 505 mm Weight xt S60 x 564 x 417 mm 560 x 583 x 505 mm 25.4 kg (includes supplies) 36kg (includes supplies) Vight x		PDF, JPEG, TIFF						
First copy out Black (AQ): As fast as 7.1 sec; Black (A4, sleep): As fast as 21.6 sec; Black (letter): As fast as 7.1 sec; Black (letter, sleep): As fast as 21.6 sec; Black (letter): As fast as 7.1 sec; Black (letter, sleep): As fast as 21.6 sec; Black (letter): As fast as 7.1 sec; Black (letter, sleep): As fast as 21.6 sec; Black (letter): As fast as 7.1 sec; Black (letter, sleep): As fast as 21.6 sec; Black (letter): As fast as 7.1 sec; Black (letter, sleep): As fast as 21.6 sec; Black (letter): As fast as 7.1 sec; Black (letter, sleep): As fast as 21.6 sec; Black (letter): As fast as 7.1 sec; Black (letter, sleep): As fast as 21.6 sec; Black (letter): As fast as 7.1 sec; Black (letter, sleep): As fast as 21.6 sec; Black (letter): As fast as 7.1 sec; Black (letter, sleep): As fast as 21.6 sec; Black (letter): As fast as 7.1 sec; Black (letter):	Copier smart software	ID Copy, Book Copy, N-UP, Reduce/Enlarge						
Max no ôf topies Up to 999 copies Copier resize 25 to 400% Copier resize 25 to 400% Sondard Sondardia Consectivity Sondardia Sondard Sondardia Consectivity Sondardia Sondard Sondardia Consectivity Sondardia Wrieless Consectivity Sondard Sondardia Consectivity Standard (build-in 10/100 Base TX Ethernet) Memory Standard 256 M8 Standard Standard 256 M8 Processor speed 600 MH2 Up to 50,000 pages per month; Recommended monthy page volume ⁵ ; 2000 to 5000 Paper handling Final Input Tray 1: 100 sheet, Tray 2: 250 sheet Output Up to 50,000 pages per month; Recommended monthy page volume ⁵ ; 2000 to 5000 Paper handling Final Input Tray 1: 100 sheet, Tray 2: 250 sheet Output Up to 520 sheets Media toyee Flain, Mid-weight, Lipht, HP Laser Jet, Colored, Preprinted, Recycled, Intermediate, Lettrefnead, Prepunched Media toy		Black (A4): As fast as 7.1 sec: Black (A4, sleep): /	As fast as 21.6 spc: Black (letter): As fast as 7.1 s	er: Black (letter sleep): As fast as 21.6 sec				
Copier resize 25 to 400% Copier settings 600 × 600 dpi x2 bit; 0 riginals content settings: Text, Text/Photo, Map, Reduce/Enlarge scaling: 25 to 400%; Copy quy settings: 1 to 999; Darkness controls: 11 levels (Light, Normal, Dark); Collation: Yes (Limited); N-up: A3: 2/4/8/16-up; A4: 2/4/8-up Connectivity Hi-Speed USB 2.0 Device, Ethernet 10/100 Base TX Wireless wireless Onnectivity No Standard (build-in 10/100 Base TX Ethernet) Memory Standard: 256 MB Standard: 512 MB Standard: 512 MB Processor speed 600 MH2 Duby cycle Up to 50,000 pages per month; Recommended monthly page volume ⁵ ; 2000 to 5000 Paper handling Inay 1: 100 sheet, Tray 2: 250 sheet Output Up to 520 sheets Media weight Tray 1: 100 sheet, Tray 2: 260 sheet Output Up to 520 sheets Media weight S60 x 540 x 417 mm S60 x 540 x 417 mm S60 x 583 x 505 mm Weight Sin the Power cord; Toner Cartridge; User Guide Software Gommon Installer, V3 Print Driver with Lite SM, TWAIN/WIA Driver, HP MFP Scan, HP Scan to PC Lite Wireless Wireless and towin installer, V3 Print Driver with Lite SM, TWAIN/WIA Dri								
600, sc00, dji x 2 bit: Originals content settings: Text, Fext/Photo, Photo, May, Reduce/Enlarge scaling: 25 to 400%; Copy qty settings: 1 to 999; Connectivity bit:seed USB 2.0 Device, Ethernet 10/100 Base TX Wrieless connectivity Wrieless standard connectivity bit:speed USB 2.0 Device, Ethernet 10/100 Base TX Wrieless standard connectivity No Network Standard: 512 MB Processor speed 600 MHz Duty cycle ystandard: 256 MB Processor speed 600 MHz Duty cycle ystandard: 256 MB Standard: 10 to 50,000 pages per month; Recommended monthly page volume ⁵ : 2000 to 5000 Paper handling Tray 1: 100 sheet, Tray 2: 250 sheet Output Up to 50,000 pages per month; Recommended, Recycled, Intermediate, Letterhead, Prepunched Media types Tray 1: 50 to 163 g/m²; Tray 2: 260 to 110 g/m² Media sueght Tray 1: 50 to 163 g/m²; Tray 2: 148 x 210 to 297 x 354 mm; Dimensions (WX 560 x 583 x 505 mm Weight 25 kg (includes supplies) 30 kg (includes supplies) Software Common Installer, V3 Print Driver with Lite SM, TWAIN/WIA Driver, HP MFP Scan, HP Scan to P C Lite Wi								
Darkers controls: 11 levels (Light, Normal, Dark); Collation: Yes (Limited); N-up: A3: 2/4/8/16-up; A4: 2/4/8-up Standard connectivity Hi-Speed USB 2.0 Device, Ethernet 10/100 Base TX Wireless capability: No Standard Standard: 512 MB Processor speed 600 MHz Div ocide Up to 50,000 pages per month; Recommended monthly page volume ⁵ : 2000 to 5000 Paper handling Import Tray 1: 100 sheet, Tray 2: 250 sheet Output Tray 1: 100 sheet, Tray 2: 250 sheet Output Tray 1: 100 sheet, Tray 2: 250 sheet Media weight Tray 1: 98 x 148 to 297 x 432 mm; Tray 2: 148 x 210 to 297 x 354 mm; Differences S60 x 583 x 505 mm Weight 25.4 kg (includes supplies) Wight Net S60 x 583 x 505 mm Weight 25.4 kg (includes supplies) Wight Net S60 x 583 x 505 mm Wight Net Seg (includes supplies) Wight Sin the Power cord; Toner Cartridge; User Guide Software Common Installer, V3 Print Driver with Life SM, TWAIN/WIA Driver, HP MFP Scan, HP Scan to PC Life Windows 2016 Server, Cred Hat Enterprise Level Sci. 10, 11, 20, 41, 21, 21, 21, 21, 21, 21, 21, 21, 21, 2	· · ·	600 x 600 dpi x 2 bit: Originals content settings:	: Text, Text/Photo, Photo, Map; Reduce/Enlarge s	caling: 25 to 400% ; Copy gty settings: 1 to 999;				
Standard H-Speed USB 2.0 Device, Ethernet 10/100 Base TX Wireless No Network Standard (build-in 10/100 Base TX Ethernet) Capability No Network Standard: 256 MB Standard: 256 MB Standard: 512 MB Processor speed 600 MHz Duty cycle, monthyly Up to 50.000 pages per month; Recommended monthly page volume ⁵ : 2000 to 5000 Paper handling Up to 50.000 pages per month; Recommended monthly page volume ⁵ : 2000 to 5000 Paper handling Input Input Tray 1: 100 sheet, Tray 2: 250 sheet Output Up to 520 Sheets Output Up to 520 Sheets Output Tray 1: 30 sheet, Tray 2: 260 to 110 g/m ² Media sueght Tray 1: 30 x 148 to 297 x 432 mm; Tray 2: 148 x 210 to 297 x 354 mm; Dimensions (w) 560 x 540 x 417 mm Veloht 25 kg (includes supplies) 25 kg (includes supplies) 25 kg (includes supplies) 30 kg (includes supplies) Windows 7 (32/64 bit), Windows 2008 Server R2, Windows 8 (32/64 bit), Windows 8 (132/64 bit), Windows 10 (32/64 bit), Windows 2012 Server Boort trained warranty Systems Windows 7 (32/64 bit), Windows 2008 Server R2, Windows 8 (32/64 bit), Windows 8 (132/64 bit), Wind		Darkness controls: 11 levels (Light, Normal, Dar	k); Collation: Yes (Limited); N-up: A3: 2/4/8/16-u	p; A4: 2/4/8-up				
His-Beed USB 2.0 Device, Ethernet 10/100 Base 1X Wireless capability No Network Standard (build-in 10/100 Base TX Ethernet) Memory Standard: 256 MB Processor speed 600 MHz Duty order Inonthy Up to 50,000 pages per month; Recommended monthy page volume ⁵ ; 2000 to 5000 Paper handling Input Tray 1: 100 sheet, Tray 2: 250 sheet Output Up to 250 Sheets Media bytes Vision Media sizes Carbon Custout Up to 250 Sheets Media Sizes Custout Up to 50 x 540 x 417 mm Kah Soft vare Software Noded Software Common Installer, V3 Print Driver with Lite SM, TWAIN/WIA Driver, HP MFP Scan, HP Scan to PC Lite Warranty Software Compatible Systems Compatible Windows 7 (132/64 bit), Windows 2008 Server R2, Windows 8 (32/64 bit), Windows 8								
Wireless No Network Capability Standard (build-in 10/100 Base TX Ethernet) Memory Standard: 256 MB Processor speed 600 MHz Up to 50,000 pages per month; Recommended monthly page volume ⁵ ; 2000 to 5000 Paper handling Input Tray 1: 100 sheet, Tray 2: 250 sheet Output Up to 50,000 pages per month; Recommended monthly page volume ⁵ ; 2000 to 5000 Paper handling Input Input Tray 1: 100 sheet, Tray 2: 250 sheet Output Up to 50,000 pages per month; Recommended, Recycled, Intermediate, Letterhead, Prepunched Media Sizes Plain, Mid-weight, Light, HP Laser Jet, Colored, Preprinted, Recycled, Intermediate, Letterhead, Prepunched Media Sizes Tray 1: 98 x 148 to 297 x 432 mm; Tray 2: 148 x 210 to 297 x 354 mm; Dimensions (wx dxh) 560 x 583 x 505 mm Weight 25 kg (includes supplies) 25 kg (includes supplies) 30 kg (includes supplies) 30 kg (includes supplies) Whights in the power cord; Toner Cartridge; User Guide Software Software Common Installer, V3 Print Driver with Lite SM, TWAIN/WIA Driver, HP MFP Scan, HP Scan to PC Lite Windows 7 (32/G4 biti		Hi-Speed USB 2.0 Device, Ethernet 10/100 Base	e TX					
Network capabilities capabilities (apabilities) Standard: 256 MB Standard: 512 MB Memory Standard: 256 MB Standard: 512 MB Processor speed 600 MHz Up to 50,000 pages per month; Recommended monthly page volume ⁵ ; 2000 to 5000 Duty cycle (monthy) Up to 50,000 pages per month; Recommended monthly page volume ⁵ ; 2000 to 5000 Up to 250 Sheets Input Tray 1: 100 sheet, Tray 2: 250 sheet Up to 50,500 FB Up to 50,500 FB Media Sizes Pain, Mid-weight, Light, HP LaserJet, Colored, Preprinted, Recycled, Intermediate, Letterhead, Prepunched Tray 1: 60 to 163 g/m; Tray 2: 60 to 110 g/m? Media Sizes Tray 1: 98 x 148 to 297 x 432 mm; Tray 2: 148 x 210 to 297 x 354 mm; S60 x 583 x 505 mm Otimensions (wx dxh) 560 x 540 x 417 mm 560 x 583 x 505 mm Weight 25 kg (includes supplies) 25.4 kg (includes supplies) 30 kg (includes supplies) Software included Common Installer, V3 Print Driver with Lite SM, TWAIN/WIA Driver, HP MFP Scan, HP Scan to PC Lite Windows 7 (32/64 bit), Windows 2008 Server R2, Windows 8 (32/64 bit), Windows 8.1 (32/64 bit), Windows 10 (32/64 bit), Windows 2012 Serve Windows 2015 Server, Reel Hat Enterprise Linux: 5, 6, 7, Fedora: 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, openSUSE : 112, 11.4, 12.1, 12.1, 21.2, 23, 13.1, 13.2, 42.1, Ubunt: 11.10, 12.04, 12.10, 13.04, 13.01, 13.04, 1	Wireless	No						
Processor speed 600 MHz Duty cycle (monthly) Up to 50,000 pages per month; Recommended monthly page volume ⁵ ; 2000 to 5000 Paper handling Input Tray 1: 100 sheet, Tray 2: 250 sheet Output Up to 250 Sheets Output Up to 250 Sheets Media types Plain, Mid-weight, Light, HP LaserJet, Colored, Preprinted, Recycled, Intermediate, Letterhead, Prepunched Media sizes Tray 1: 60 to 163 g/m²; Tray 2: 60 to 110 g/m² Media sizes Tray 1: 98 x 148 to 297 x 432 mm; Tray 2: 148 x 210 to 297 x 354 mm; Dimensions (wx dxh) 560 x 540 x 417 mm 560 x 583 x 505 mm Weight 25 kg (includes supplies) 25.4 kg (includes supplies) 30 kg (includes supplies) What's in the boxl Power cord; Toner Cartridge; User Guide Software Common Installer, V3 Print Driver with Lite SM, TWAIN/WIA Driver, HP MFP Scan, HP Scan to PC Lite Warrantly detures One-year, on-site limited warrantly Systems Gompatible Vindows 2016 Server, R2, Windows 2008 Server R2, Windows 8 (32/64 bit), Windows 8.1 (32/64 bit), Windows 10 (32/64 bit), Windows 2015 Server, server, Cartridicated USB on entwork connection, dedicated USB on entwork connection, acdicated USB on entwork connection, dedicated USB on entwork connection, dedicated USB on entwork connection, de	Network capabilities	Standard (build-in 10/100 Base TX Ethernet)						
Duty cycle Up to 50,000 pages per month; Recommended monthly page volume ⁵ : 2000 to 5000 Paper handling Input Tray 1: 100 sheet, Tray 2: 250 sheet Output Up to 250 Sheets Output Media types Plain, Mid-weight, Light, HP Laser Jet, Colored, Preprinted, Recycled, Intermediate, Letterhead, Prepunched Media types Plain, Mid-weight, Light, HP Laser Jet, Colored, Preprinted, Recycled, Intermediate, Letterhead, Prepunched Media weight Tray 1: 98 x 148 to 297 x 432 mm; Tray 2: 160 to 10 g/m² Togets Tray 1: 98 x 148 to 297 x 432 mm; Tray 2: 148 x 210 to 297 x 354 mm; Dimensions (wx 560 x 540 x 417 mm Vegipt 25 kg (includes supplies) 25 kg (includes supplies) 25.4 kg (includes supplies) Wingt's in the Power cord; Toner Cartridge; User Guide Software Common Installer, V3 Print Driver with Lite SM, TWAIN/WIA Driver, HP MFP Scan, HP Scan to PC Lite Warranty One-year, on-site limited warranty Systems Common Installer, V3 Print Driver with Lite SM, TWAIN/WIA Driver, HP MFP Scan, HP Scan to PC Lite Windows 2016 Server, Red Hat Enterprise Linux; 5, 6, 7, Fedora; 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, openSUSE 1112, 114, 12, 112, 124, 121, 124, 124,		Standard: 256 MB	Standard: 512 MB					
(monthly)4 0p to 50,000 pages per hightin, Recommended informing page volume*, 2000 to 5000 Paper handling input Tray 1: 100 sheet, Tray 2: 250 sheet Output Up to 250 Sheets Media types Plain, Mid-weight, Light, HP Laser Jet, Colored, Preprinted, Recycled, Intermediate, Letterhead, Prepunched Media vight Tray 1: 50 to 163 g/m², Tray 2: 60 to 110 g/m² Media vight Tray 1: 98 x 148 to 297 x 432 mm; Tray 2: 148 x 210 to 297 x 354 mm; Dimensions (wX S60 x 540 x 417 mm S60 x 510 x 540 x 417 mm S60 x 543 x 505 mm Weight 25 kg (includes supplies) 25.4 kg (includes supplies) Software S60 x 540 x 417 mm S60 x 543 x 505 mm Weight 25 kg (includes supplies) 25.4 kg (includes supplies) 30 kg (includes supplies) Windows 7 (or Cord, Toner Cartridge; User Guide Software Common Installer, V3 Print Driver with Lite SM, TWAIN/WIA Driver, HP MFP Scan, HP Scan to PC Lite Windows 7 (32/64 bit), Windows 2008 Server R2, Windows 8 (32/64 bit), Windows 8.1 (32/64 bit), Windows 10 (32/64 bit), Windows 2015 Server, Server, Rel Hat Enterprise Linux; 5, 6, 7, Fedora; 15, 16, 17, 18, 19, 20, 21, 22, 22, 42, 52, 6, openSUSE : 112, 11, 4, 12, 121, 212, 23, 13.1, 132, 42.1, Ubuntu: 11.10, 12.0et 16, 7, 8.9 Linux Mint : 15, 16, 17, 18, 19, 20, 21, 22, 22, 42, 52, 6, openSUSE : 12, 11, 4, 12, 1, 12.1, 212, 23, 13.1, 132, 42.1, Ubuntu: 11.10, 12.0et 16,	Processor speed	600 MHz	·					
Anomaly Tray 1: 100 sheet, Tray 2: 250 sheet Output Up to 250 Sheets Media types Plain, Mid-weight, Light, HP LaserJet, Colored, Preprinted, Recycled, Intermediate, Letterhead, Prepunched Media types Plain, Mid-weight, Light, HP LaserJet, Colored, Preprinted, Recycled, Intermediate, Letterhead, Prepunched Media types Tray 1: 98 x 148 to 297 x 432 mm; Tray 2: 148 x 210 to 297 x 354 mm; Dimensions (wx S60 x 540 x 417 mm S60 x 540 x 417 mm S60 x 583 x 505 mm Weight 25 kg (includes supplies) 30 kg (includes supplies) Weight 25 kg (includes supplies) 25.4 kg (includes supplies) What's in the box Power cord; Toner Cartridge; User Guide Software included Common Installer, V3 Print Driver with Lite SM, TWAIN/WIA Driver, HP MFP Scan, HP Scan to PC Lite Warranty One-year, on-site limited warranty Systems Vindows 7 (32/64 bit), Windows 2008 Server R2, Windows 8 (32/64 bit), Windows 8.1 (32/64 bit), Windows 10 (32/64 bit), Windows 2015 Server, Red Hat Enterprise Linux: 5, 6, 7, Fedora: 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, openSUSE : 112, 11.4, 12, 12.1, 22, 23, 21, 23, 23, 24, 25, 26, openSUSE : 112, 11.4, 12, 12.1, 21.2, 23, 23, 12.3, 13.1, 13.2, 42.1, Ubuntu: 11.10, 12.0, 41, 41, 10, 15.0, 41, 15, 10, 16.0, 16.0, 17.0, 4, 17.10, 18.0, 418, 41, 19.04, 410, 15.0, 416, 410, 17.0, 418, 40, 19.04, SUSE Linux Enterprise Desktop: 10, 11, 12, DeBitan 5, 7, 8, 9, Linu		Up to 50,000 pages per month; Recommended	monthly page volume ⁵ : 2000 to 5000					
Input Tray 1: 100 sheet, Tray 2: 250 sheet Output Up to 250 Sheets Media types Plain, Mid-weight, Light, HP LaserJet, Colored, Preprinted, Recycled, Intermediate, Letterhead, Prepunched Media Sizes Tray 1: 60 to 163 g/m²; Tray 2: 60 to 110 g/m² Media Sizes Tray 1: 98 x 148 to 297 x 432 mm; Tray 2: 148 x 210 to 297 x 354 mm; Dimensions (wx dxh) 560 x 540 x 417 mm Software 560 x 563 x 505 mm Weight 25 kg (includes supplies) Power cord; Toner Cartridge; User Guide Software Common Installer, V3 Print Driver with Lite SM, TWAIN/WIA Driver, HP MFP Scan, HP Scan to PC Lite Waranty One-year, on-site limited waranty Systems Vindows 7 (32/64 bit), Windows 2008 Server R2, Windows 8 (32/64 bit), Windows 8.1 (32/64 bit), Windows 10 (32/64 bit), Windows 2015 Server, Red Hat Enterprise Linux : 5, 6, 7, Fedora : 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, openSUSE : 112, 114, 12.1, 12.1, 23, 12.3, 13.1, 13.2, 42.1, Ubunt : 11.10, 12.04, 12.10, 13.04, 13.10, 14.04, 14.10, 15.04, 15.10, 16.04, 16.10, 17.04, 17.10, 18.04, 18.10, 19.04, SUSE Linux Enterprise Desktop : 10.11, 12, DeBain : 6, 7, 8, 9, Linux Mint : 15, 16, 17, 18 Minimum system FGCO-ROM or DVD drive, or Internet connection; dedicated USB or network connection ro Wireless connection; 200 MB available hand disk space: GBB for Linux Security Embedded We Server: password protection/encryption, Secure Erase of Cl	· · · · · · · · · · · · · · · · · · ·		, , , , , , , , , , , , , , , , , , ,					
Output Up to 250 Sheets Media types Plain, Mid-weight, Light, HP Laser Jet, Colored, Preprinted, Recycled, Intermediate, Letterhead, Prepunched Media weight Tray 1: 60 to 163 g/m²; Tray 2: 60 to 110 g/m² Media weight Tray 1: 98 x 148 to 297 x 432 mm; Tray 2: 148 x 210 to 297 x 354 mm; Dimensions (wx d x h) 560 x 540 x 417 mm Weight 25 kg (includes supplies) Vants in the box 25 kg (includes supplies) Software Power cord; Toner Cartridge; User Guide Software Common Installer, V3 Print Driver with Lite SM, TWAIN/WIA Driver, HP MFP Scan, HP Scan to PC Lite Warranty features One-year, on-site limited warranty Systems One-year, on-site limited warranty Systems' Sund Server, Red Hat Enterprise Linux : 5, 6, 7, Fedora : 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, openSUSE : 112, 11.4, 12.1, 121.2, 10, 13.0, 41.3, 10, 41.04, 14.10, 15.04, 15.10, 16.04, 16.10, 17.04, 18.10, 19.04, 12.3, 13.1, 13.2, 42.1, Ubuntu : 11.10, 12.04, 12.10, 13.04, 13.10, 14.04, 14.10, 15.04, 16.10, 17.04, 17.10, 18.04, 18.10, 19.04, 12.3, 13.1, 13.2, 42.1, Ubuntu : 11.10, 12.04, 12.10, 13.04, 13.10, 14.04, 14.10, 15.04, 16.10, 17.04, 17.10, 18.04, 18.10, 19.04, 12.3, 13.1, 13.2, 42.1, 04.13.0, 14.04, 14.10, 15.04, 14.10, 15.04, 16.10, 17.04, 17.10, 18.04, 18.10, 19.04, 12.3, 13.1, 13.2, 42.1, 04.13.0, 14.04, 14.10, 15.04, 14.10, 15.10, 16.04, 16.10, 17.04, 17.10, 18.04, 18.10, 19.04, 12.1, 12.1, 12.1, 12.3, 13.1, 13.2, 42.1, 04.1		Tray 1: 100 choot Tray 2: 250 choot						
Media types Plain, Mid-weight, Light, HP Laser, Jet, Colored, Preprinted, Recycled, Intermediate, Letterhead, Prepunched Media Sizes Tray 1: 60 to 163 g/m²; Tray 2: 60 to 110 g/m² Media Sizes Tray 1: 98 x 148 to 297 x 432 mm; Tray 2: 148 x 210 to 297 x 354 mm; Dimensions (W x d x h) 560 x 540 x 417 mm 560 x 583 x 505 mm Weight 25 kg (includes supplies) 25.4 kg (includes supplies) 30 kg (includes supplies) Whight 25 kg (includes supplies) 20 kg (includes supplies) 30 kg (includes supplies) Windware Common Installer, V3 Print Driver with Lite SM, TWAIN/WIA Driver, HP MFP Scan, HP Scan to PC Lite Windware Software Compatible Windows 7 (32/64 bit), Windows 2008 Server R2, Windows 8 (32/64 bit), Windows 8.1 (32/64 bit), Windows 10 (32/64 bit), Windows 2012 Serve Windows 2016 Server, Red Hat Enterprise Linux: 5, 6, 7, Fedora: 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 0penSUSE: 112, 11.4, 12.1, 12.1, 21.0, 13.0, 41.0, 15.0, 41.50, 15.0, 16.0, 41.61, 01.7.0, 18.0, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0, 41.50, 19.0,								
Media weight Tray 1: 60 to 163 g/m²; Tray 2: 60 to 110 g/m² Media Sizes Custom Tray 1: 98 x 148 to 297 x 432 mm; Tray 2: 148 x 210 to 297 x 354 mm; Dimensions (w x d x h) 560 x 540 x 417 mm Security Media tin the box 560 x 540 x 417 mm Power cord; Toner Cartridge; User Guide 30 kg (includes supplies) Software Included Power cord; Toner Cartridge; User Guide Software Included Common Installer, V3 Print Driver with Lite SM, TWAIN/WIA Driver, HP MFP Scan, HP Scan to PC Lite Warranty Reatures One-year, on-site limited warranty Systems Windows 7 (32/64 bit), Windows 2008 Server R2, Windows 8 (32/64 bit), Windows 8.1 (32/64 bit), Windows 10 (32/64 bit), Windows 2012 Serve Windows 2016 Server, Red Hat Enterprise Linux: S, 6, 7, Fedora: 15, 15, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, openSUSE : 112, 114, 12, 11, 21, 212, 21 22, 31, 31, 13, 24, 24, 12, 10, 310, 14, 04, 14, 10, 15, 04, 16, 10, 17, 04, 17, 10, 18, 04, 18, 10, 19, 04, Systems Minimum system requirements PCCD-ROM or DVD drive, or Internet connection; deciated USB or network connection release connection; 200 MB available hard disk space; (For OS hardware requirements see microsoft.com) for Windows, Pentium IV 2.4GHz (Intel Core ^{M2} 2) / RAM 512 MB (1 GB) / Free HDD space 1 GB (GB) for Linux Security management Embedded Web Server: password protection/encryption, Secure Erase of Client Data, configurable login failure policy, configurable auto logout, Certificate Management, Pre-Shared Key Authentication, Support for WJA-10, IPv4/v6			Preprinted Recycled Intermediate Letterbead P	repunched				
Media Sizes Custorn Tray 1: 98 x 148 to 297 x 432 mm; Tray 2: 148 x 210 to 297 x 354 mm; Dimensions (w x d x h) 560 x 540 x 417 mm Weight 25 kg (includes supplies) 25.4 kg (includes supplies) Waight 25 kg (includes supplies) 25.4 kg (includes supplies) What's in the box Power cord; Toner Cartridge; User Guide Software included Common Installer, V3 Print Driver with Lite SM, TWAIN/WIA Driver, HP MFP Scan, HP Scan to PC Lite Warranty features One-year, on-site limited warranty Systems Windows 7 (32/64 bit), Windows 2008 Server R2, Windows 8 (32/64 bit), Windows 8.1 (32/64 bit), Windows 10 (32/64 bit), Windows 2012 Server Windows 2016 Server, Red Hat Enterprise Linux: 5 (6, 7, Fedora : 15, 16, 17, 18, 19, 20, 12, 22, 23, 24, 25, 26, openSUSE : 112, 114, 12, 12, 12, 12, 12, 12, 12, 12, 12, 12			reprinted, necycled, intermediate, zetternedd, r					
Custom S60 x 540 x 417 mm S60 x 583 x 505 mm Weight 25 kg (includes supplies) 25.4 kg (includes supplies) 30 kg (includes supplies) What's in the box Power cord; Toner Cartridge; User Guide Software Software Common Installer, V3 Print Driver with Lite SM, TWAIN/WIA Driver, HP MFP Scan, HP Scan to PC Lite Warranty One-year, on-site limited warranty Systems One-year, on-site limited warranty Systems Windows 7 (32/64 bit), Windows 2008 Server R2, Windows 8 (32/64 bit), Windows 8.1 (32/64 bit), Windows 10 (32/64 bit), Windows 2012 Server Compatible operating systems' Windows 7 (32/64 bit), Windows 2008 Server R2, Windows 8 (32/64 bit), Windows 8.1 (32/64 bit), Windows 10 (32/64 bit), Windows 2012 Server Minimum systems' Display PC:CD-ROM or DVD drive, or Internet connection; dedicated USB or network connection or Wireless connection; 200 MB available hard disk space; (For OS hardware requirements see microsoft.com) for Windows, Pentium IV 2.4GHz (Intel Core ^{M2}) / RAM 512 MB (1 GB) / Free HDD space 1 GB (GB) for Linux Security management Embedded Web Server; password protection/encryption, Secure Erase of Client Data, configurable login failure policy, configurable auto logout, Certificate Management, Pre-Shared key Authentication, Support for Window 20, Parkey Sitter, IS, SMP Server Certificate Validation, Encrypted Customer Data Storage, secure browsing via SSL/TLS, SMTP over SSL/TLS, IPSec, SNMPv3 Fonts and t	Media Sizes	Tray 1:98 x 148 to 297 x 432 mm Tray 2: 148	x 210 to 297 x 354 mm.					
d x h) 560 x 363 x 305 millit Weight 25 kg (includes supplies) 25.4 kg (includes supplies) 30 kg (includes supplies) What's in the box Power cord; Toner Cartridge; User Guide 30 kg (includes supplies) Software included Common Installer, V3 Print Driver with Lite SM, TWAIN/WIA Driver, HP MFP Scan, HP Scan to PC Lite Warranty features One-year, on-site limited warranty Systems Systems Compatible operating systems' Windows 7 (32/64 bit), Windows 2008 Server R2, Windows 8 (32/64 bit), Windows 8.1 (32/64 bit), Windows 10 (32/64 bit), Windows 2012 Serve Windows 2016 Server, Red Hat Enterprise Linux: 5, 6, 7, Fedora: 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, openSUSE : 112, 11.4, 12.1, 12.1, 20.4, 12.1, 13.0, 42.4, 13.0, 14.04, 14.10, 15.04, 15.10, 16.04, 16.10, 17.04, 17.10, 18.04, 18.10, 19.04, SUSE Linux Enterprise Desktop : 10, 11, 12, Debian : 6, 7, 8, 9, Linux Mint : 15, 16, 17, 18 Minimum system PCCD-ROM or DVD drive, or Internet connection; dedicated USB or network connection or Wireless connection; 200 MB available hard disk space; GB for Linux Security Embedded Web Server: password protection/encryption, Secure Erase of Client Data, configurable login failure policy, configurable auto logout, Crificate Management, Pre-Shared Key Authentication, Support for WJA-10, IPV4/Jo/fmac address filtering, SMTP server Certificate Validation, Encrypted Customer Data Storage, secure browsing via SSL/TLS, SMTP over SSL/TLS, IPSec, SMMPv3 Security Control panel 4-Line LCD, power b								
Weight 25.4 kg (includes supplies) 30 kg (includes supplies) What's in the box' Power cord; Toner Cartridge; User Guide Software included Common Installer, V3 Print Driver with Lite SM, TWAIN/WIA Driver, HP MFP Scan, HP Scan to PC Lite Warranty features One-year, on-site limited warranty Systems Windows 7 (32/64 bit), Windows 2008 Server R2, Windows 8 (32/64 bit), Windows 8.1 (32/64 bit), Windows 10 (32/64 bit), Windows 2012 Server Windows 2016 Server, Red Hat Enterprise Linux: 5, 6, 7, Fedora: 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, openSUSE : 112, 11.4, 12.1, 121.2 Compatible operating systems Windows 7 (32/64 bit), Windows 2008 Server R2, Windows 8 (32/64 bit), Windows 8.1 (32/64 bit), Windows 10 (32/64 bit), Windows 2012 Server Windows 2016 Server, Red Hat Enterprise Linux: 5, 6, 7, Fedora: 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, openSUSE : 112, 11.4, 12.1, 121.2 Systems Windows 2016 Server, Red Hat Enterprise Linux: 5, 6, 7, Fedora: 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, openSUSE : 112, 11.4, 12.1, 12.1, 12.3, 13.1, 13.2, 42.1, Ubuntu: 11.10, 12.04, 13.10, 14.04, 14.10, 15.04, 15.10, 16.04, 16.10, 17.04, 17.10, 18.04, 18.10, 19.04, SUSE Linux Enterprise Desktop: 10, 11, 12, Debian : 6, 7, 8, 9, Linux Mint: 15, 16, 17, 18 Minimum system PC:CD-ROM or DVD drive, or Internet connection; dedicated US Bor network connection or Wireless connection; 200 MB available hard disk space; (FO O'S hardware requirements see microsoft.com) for Windows, Pentium IV 2.4GHz (Intel Core ^{m2} 2) / RAM 512 MB (1 GB) / Free HDD space 1 GB (GB) for Linux Security E		560 x 540 x 417 mm		560 x 583 x 505 mm				
What's in the box Power cord; Toner Cartridge; User Guide Software included Common Installer, V3 Print Driver with Lite SM, TWAIN/WIA Driver, HP MFP Scan, HP Scan to PC Lite Warranty features One-year, on-site limited warranty Systems One-year, on-site limited warranty Compatible operating systems' Windows 7 (32/64 bit), Windows 2008 Server R2, Windows 8 (32/64 bit), Windows 8.1 (32/64 bit), Windows 10 (32/64 bit), Windows 2012 Server, Red Hat Enterprise Linux: 5, 6, 7, Fedora: 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, openSUSE: 112, 11.4, 12.1, 12.0, 13.04, 13.10, 14.04, 15.04, 15.10, 16.04, 16.10, 17.04, 17.10, 18.04, 18.10, 19.04, SUSE Linux Enterprise Desktop: 10, 11, 12, Openai: 6, 7, 8, 9, Linux Mint: 15, 16, 17, 18 Minimum system PC:O-ROM or DVD drive, or Internet connection; dedicated USB or network connection or Wireless connection; 200 MB available hard disk space; (For OS hardware requirements see microsoft.com) for Windows, Pentium IV 2.4GHz (Intel Core™2) / RAM 512 MB (1 GB) / Free HDD space 1 GB (GB) for Linux Security Embedded Web Server: password protection/encryption, Secure Erase of Client Data, configurable login failure policy, configurable auto logout, Carbina address filtering, SMTP server Certificate Validation, Encrypted Customer Data Storage, secure browsing via SSL/TLS, SMTP over SSL/TLS, IPP over SSL/TLS, IPP server Certificate Validation, Encrypted Customer Data Storage, secure browsing via SSL/TLS, SMTP over SSL/TLS, IPP over SSL/TLS, IPP server Certificate Validation, Encrypted Customer Data Storage, secure browsing via SSL/TLS, SMTP over SSL/TLS, IPP over SSL/TLS, IPSec, SNMPv3 Fonts and typefaces	Weight	25 kg (includes supplies)	25.4 kg (includes supplies)	30 kg (includes supplies)				
Software included Common Installer, V3 Print Driver with Lite SM, TWAIN/WIA Driver, HP MFP Scan, HP Scan to PC Lite Warranty features One-year, on-site limited warranty Systems Windows 7 (32/64 bit), Windows 2008 Server R2, Windows 8 (32/64 bit), Windows 8.1 (32/64 bit), Windows 10 (32/64 bit), Windows 2012 Server Windows 2016 Server, Red Hat Enterprise Linux : 5, 6, 7, Fedora : 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, openSUSE : 112, 11.4, 12.1, 121.2 (32, 13.1, 13.2, 42.1, Ubuntu : 11.0, 12.04, 12.10, 13.04, 13.10, 14.04, 14.10, 15.04, 15.10, 16.04, 16.10, 17.04, 17.10, 18.04, 18.10, 19.04, SUSE Linux Enterprise Desktop : 10, 11, 12, Debian : 6, 7, 8, 9, Linux Mint : 15, 16, 17, 18 Minimum system requirements PC:CD-ROM or DVD drive, or Internet connection; dedicated USB or network connection or Wireless connection; 200 MB available hard disk space; (For OS hardware requirements see microsoft.com) for Windows, Pentium IV 2.4GHz (Intel Core™2) / RAM 512 MB (1 GB) / Free HDD space 1 GB (3 GB) for Linux Security management Embedded Web Server: password protection/encryption, Secure Erase of Client Data, configurable login failure policy, configurable auto logout, Certificate Management, Pre-Shared Key Authentication, Support for WJA-10, IPv4/v6/mac address filtering, SMTP server Certificate Validation, Encrypted Customer Data Storage, secure browsing via SSL/TLS, SMTP over SSL/TLS, IPP over SSL/TLS, IPSec, SNMPv3 Fonts and typefaces 49 Scalable Fonts / 1 Bitmap Control panel 4-Line LCD, power button LED (White 1EA) Navi. Key LED (White 4EA) status LED (Green 1EA, Orange 1EA), power key, start key, stop key, cancel key reset key, numerical key (12EA),Navi. Key (4EA),OK key,								
features Onle-year, on-site unified warranty Systems Systems Compatible operating systems Windows 7 (32/64 bit), Windows 2008 Server R2, Windows 8 (32/64 bit), Windows 8.1 (32/64 bit), Windows 10 (32/64 bit), Windows 2012 Server, Windows 2016 Server, Red Hat Enterprise Linux: 5, 6, 7, Fedora: 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, openSUSE : 112, 11.4, 12.1, 121.2 ystems 2.3, 13.1, 13.2, 42.1, Ubuntu: 11.10, 12.04, 12.10, 13.04, 13.10, 14.04, 14.10, 15.04, 15.10, 16.04, 16.10, 17.04, 17.10, 18.04, 18.10, 19.04, SUSE Linux Enterprise Desktop: 10, 11, 12, Debian: 6, 7, 8, 9, Linux Mint: 15, 16, 17, 18 Minimum system requirements PC:CD-ROM or DVD drive, or Internet connection; dedicated USB or network connection or Wireless connection; 200 MB available hard disk space; (For OS hardware requirements see microsoft.com) for Windows, Pentium IV 2.4GHz (Intel Core™2) / RAM 512 MB (1 GB) / Free HDD space 1 GB (2 GB) for Linux Security Embedded Web Server: password protection/encryption, Secure Erase of Client Data, configurable login failure policy, configurable auto logout, Certificate Management, Pre-Shared Key Authentication, Support for WJA-10, IPv4/v6/mac address filtering, SMTP server Certificate Validation, Encrypted Customer Data Storage, secure browsing via SSL/TLS, SMTP over SSL/TLS, IPP over SSL/TLS, IPSec, SNMPv3 Fonts and typefaces 49 Scalable Fonts / 1 Bitmap Control panel 4-Line LCD, power button LED (White 1EA) Navi. Key LED (White 4EA) status LED (Green 1EA, Orange 1EA), power key, start key, stop key, cancel ke reset key, numerical key (12EA), Navi. Key LED (White 4EA), status LED (Green 1EA, Orange 1EA), power		Common Installer, V3 Print Driver with Lite SM, 1	TWAIN/WIA Driver, HP MFP Scan, HP Scan to PC Li	ite				
Systems Systems Compatible operating systems Windows 7 (32/64 bit), Windows 2008 Server R2, Windows 8 (32/64 bit), Windows 8.1 (32/64 bit), Windows 10 (32/64 bit), Windows 2012 Server Windows 2016 Server, Red Hat Enterprise Linux : 5, 6, 7, Fedora : 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, openSUSE : 112, 11.4, 12.1, 121.2 12.3, 13.1, 13.2, 42.1, Ubuntu : 11.10, 12.04, 12.10, 13.04, 13.10, 14.04, 14.10, 15.04, 15.10, 16.04, 16.10, 17.04, 17.10, 18.04, 18.10, 19.04, SUSE Linux Enterprise Desktop : 10, 11, 12, Debian : 6, 7, 8, 9, Linux Mint : 15, 16, 17, 18 Minimum system requirements PC:CD-ROM or DVD drive, or Internet connection; dedicated USB or network connection or Wireless connection; 200 MB available hard disk space; (For OS hardware requirements see microsoft.com) for Windows, Pentium IV 2.4GHz (Intel Core ^{™2}) / RAM 512 MB (1 GB) / Free HDD space 1 GB (2 GB) for Linux Security management Embedded Web Server: password protection/encryption, Secure Erase of Client Data, configurable login failure policy, configurable auto logout, Certificate Management, Pre-Shared Key Authentication, Support for WJA-10, IPv4/v6/mac address filtering, SMTP server Certificate Validation, Encrypted Customer Data Storage, secure browsing via SSL/TLS, SMTP over SSL/TLS, IPP over SSL/TLS, IPSec, SNMPv3 Fonts and typefaces 49 Scalable Fonts / 1 Bitmap Control panel 4-Line LCD, power button LED (White 1EA) Navi. Key LED (White 4EA) status LED (Green 1EA, Orange 1EA), power key, start key, stop key, cancel key reset key, numerical key (12EA), Navi. Key (4EA), OK key, menu key (2EA), function key (4EA) Display 4-line LCD ENERGY STAR	Warranty	One-year, on-site limited warranty						
Compatible operating systems? Windows 7 (32/64 bit), Windows 2008 Server R2, Windows 8 (32/64 bit), Windows 8.1 (32/64 bit), Windows 10 (32/64 bit), Windows 2012 Server Windows 2016 Server, Red Hat Enterprise Linux : 5, 6, 7, Fedora : 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, openSUSE : 112, 11.4, 12.1, 12.12, 12.3, 13.1, 13.2, 42.1, Ubuntu : 11.10, 12.04, 12.10, 13.04, 13.10, 14.04, 14.10, 15.04, 15.10, 16.04, 16.10, 17.04, 17.10, 18.04, 18.10, 19.04, SUSE Linux Enterprise Desktop : 10, 11, 12, Debian 6, 7, 8, 9, Linux Mint : 15, 16, 17, 18 Minimum system requirements PC:CD-ROM or DVD drive, or Internet connection; dedicated USB or network connection or Wireless connection; 200 MB available hard disk space; (For OS hardware requirements see microsoft.com) for Windows, Pentium IV 2.4GHz (Intel Core™2) / RAM 512 MB (1 GB) / Free HDD space 1 GB (2 GB) for Linux Security management Embedded Web Server: password protection/encryption, Secure Erase of Client Data, configurable login failure policy, configurable auto logout, Certificate Management, Pre-Shared Key Authentication, Support for WJA-10, IPV4/v6/mac address filtering, SMTP server Certificate Validation, Encrypted Customer Data Storage, secure browsing via SSL/TLS, SMTP over SSL/TLS, IPP over SSL/TLS, IPSec, SNMPv3 Fonts and typefaces 49 Scalable Fonts / 1 Bitmap Control panel 4-Line LCD, power button LED (White 1EA) Navi. Key LED (White 4EA) status LED (Green 1EA, Orange 1EA), power key, start key, stop key, cancel key reset key, numerical key (12EA), Navi. Key (4EA), OK key, menu key (2EA), function key (4EA) Display 4-Line LCD ENERGY STAR No		one-yea, on-site timited wananty						
 Windows 2016 Server, Red Hat Enterprise Linux : 5, 6, 7, Fedora : 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, openSUSE : 112, 114, 12.1, 1212, 123, 13.1, 13.2, 42.1, Ubuntu : 11.10, 12.04, 12.10, 13.04, 13.10, 14.04, 14.10, 15.04, 15.10, 16.04, 16.10, 17.04, 17.10, 18.04, 18.10, 19.04, SUSE Linux Enterprise Desktop : 10, 11, 12, Debian 6, 7, 8, 9, Linux Mint : 15, 16, 17, 18 Minimum system requirements PC:CD-ROM or DVD drive, or Internet connection; dedicated USB or network connection or Wireless connection; 200 MB available hard disk space; (For OS hardware requirements see microsoft.com) for Windows, Pentium IV 2.4GHz (Intel Core™2) / RAM 512 MB (1 GB) / Free HDD space 1 GB (2 GB) for Linux Security management Embedded Web Server: password protection/encryption, Secure Erase of Client Data, configurable login failure policy, configurable auto logout, Certificate Management, Pre-Shared Key Authentication, Support for WJA-10, IPv4/v6/mac address filtering, SMTP server Certificate Validation, Encrypted Customer Data Storage, secure browsing via SSL/TLS, SMTP over SSL/TLS, IPP over SSL/TLS, IPSec, SNMPv3 Fonts and typefaces 49 Scalable Fonts / 1 Bitmap Control panel 4-Line LCD, power button LED (White 1EA) Navi. Key LED (White 4EA) status LED (Green 1EA, Orange 1EA), power key, start key, stop key, cancel key reset key, numerical key (12EA), Navi. Key (4EA), OK key, menu key (2EA), function key (4EA) Display 4-line LCD 		Windows 7 (32/64 hit) Windows 2009 Corver D	2 Windows 8 (32/64 hit) Windows 9 1 (22/64 h	it) Windows 10 (32/64 bit) Windows 2012 Corver				
Imminuting System (For OS hardware requirements see microsoft.com) for Windows, Pentium IV 2.4GHz (Intel Core™2) / RAM 512 MB (1 GB) / Free HDD space 1 GB (2 GB) for Linux Security Embedded Web Server: password protection/encryption, Secure Erase of Client Data, configurable login failure policy, configurable auto logout, Certificate Management, Pre-Shared Key Authentication, Support for WJA-10, IPv4/v6/mac address filtering, SMTP server Certificate Validation, Encrypted Customer Data Storage, secure browsing via SSL/TLS, SMTP over SSL/TLS, IPs over SSL/TLS, IPsec, SNMPv3 Fonts and typefaces 49 Scalable Fonts / 1 Bitmap Control panel 4-Line LCD, power button LED (White 1EA) Navi. Key LED (White 4EA) status LED (Green 1EA, Orange 1EA), power key, start key, stop key, cancel key (2EA), mode key (2EA), function key (4EA) Display 4-line LCD ENERGY STAR No		Windows 2016 Server, Red Hat Enterprise Linux : 5, 6, 7, Fedora : 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, openSUSE : 112, 11.4, 12.1, 121.2, 12.3, 13.1, 13.2, 42.1, Ubuntu : 11.10, 12.04, 12.10, 13.04, 13.10, 14.04, 14.10, 15.04, 15.10, 16.04, 16.10, 17.04, 17.10, 18.04, 18.10, 19.04,						
Security Certificate Management, Pre-Shared Key Authentication, Support for WJA-10, IPv4/v6/mac address filtering, SMTP server Certificate Validation, Encrypted Customer Data Storage, secure browsing via SSL/TLS, SMTP over SSL/TLS, IPP over SSL/TLS, IPsec, SNMPv3 Fonts and typefaces 49 Scalable Fonts / 1 Bitmap Control panel 4-Line LCD, power button LED (White 1EA) Navi. Key LED (White 4EA) status LED (Green 1EA, Orange 1EA), power key, start key, stop key, cancel key reset key, numerical key (12EA), Navi. Key (4EA), OK key, menu key (2EA), mode key (2EA), function key (4EA) Display 4-line LCD ENERGY STAR No		PC:CD-ROM or DVD drive, or Internet connection; dedicated USB or network connection or Wireless connection; 200 MB available hard disk space; (For OS hardware requirements see microsoft.com) for Windows, Pentium IV 2.4GHz (Intel Core™2) / RAM 512 MB (1 GB) / Free HDD space 1 GB (2						
typefaces 49 Scalable Fonts / TBitmap Control panel 4-Line LCD, power button LED (White 1EA) Navi. Key LED (White 4EA) status LED (Green 1EA, Orange 1EA), power key, start key, stop key, cancel key reset key, numerical key (12EA), Navi. Key (4EA), OK key, menu key (2EA), mode key (2EA), function key (4EA) Display 4-line LCD ENERGY STAR No	managément	Embedded Web Server: password protection/encryption, Secure Erase of Client Data, configurable login failure policy, configurable auto logout, Certificate Management, Pre-Shared Key Authentication, Support for WJA-10, IPv4/v6/mac address filtering, SMTP server Certificate Validation, Encrypted Customer Data Storage, secure browsing via SSL/TLS, SMTP over SSL/TLS, IPP over SSL/TLS, IPsec, SNMPv3						
Control panel reset key, numerical key (12EA),Navi. Key (4EA),OK key, menu key (2EA),mode key (2EA),function key (4EA) Display 4-line LCD ENERGY STAR No								
ENERGY STAR No.	·	reset key, numerical key (12EA), Navi. Key (4EA), OK key, menu key (2EA), mode key (2EA), function key (4EA)						
	ENERGY STAR							

HP LaserJet MFP M440 series

Model	HP LaserJet MFP M440n	HP LaserJet MFP M440dn	HP LaserJet MFP M440nda	
Product number	8AF46A	8AF47A	8AF48A	
Power	Power supply type: Built-in Universal Power supply; Power supply required: AC 220 - 240V: 50/60Hz, Normal Operation 550W, Ready 80W, Max/Peak 1.1 kWh, Sleep/Power Off 1W/0.2W, TEC 0.350 kWh/Week (22PPM: 0.310 kWh/Week 23PPM: 0.330 kWh/Week 24PPM: 0.350 kWh/Week 25ppm: 0.370 kWh/Week); Power consumption ² : 580 watts (Active Printing), 80 watts (Ready) 0.7 watts (Sleep), 0.2 watts (Off); Typical Electricity Consumption number ⁶ : 1.100 kWh/Week			
Acoustics	Acoustic power emissions: 6.6 B(A) (printing at 24 ppm); Acoustic power emissions (ready): Inaudible ; Acoustic pressure emissions bystander (active, printing): 51 dB(A); Acoustic pressure emissions bystander (ready): Inaudible			
Environmental ranges	Operating temperature range: 10 to 30°C; Recommended operating temperature: 10 to 30°C; Operating humidity range: 20 to 80% RH; Recommended operating humidity range: 20 to 80% RH			
Safety approvals and requirements	EC 60950-1:2005 +A1:2009 +A2:2013 (International), EN 60950-1:2006 +A11:2009 +A1:2010 +A12:2011 +A2:2013 (EU), IEC 60825-1:2014, EN60825-1:2014 (Class 1 Laser/LED Device), Low Voltage Directive 2014/35/EU with CE Marking (Europe) GB4943.1-2011; other safety approvals as required by individual countries			
Supported network IP Management: DHCP, DHCPv6, BOOTP, AutoIP, Static; Discovery Protocol: UPnP, mDNS, DNS, WINS; Printing Protocol: (9100)v6, LPR, LPRv6, IPP, WSD; Management Protocol: SNMPv1.2, SNMPv1.2(IPv6), SNMPv3, SNMPv3(IPv6, HTTP); S protocols Network, SMTP, SMB, FTP; Security Protocol: IPSec		S; Printing Protocol: TCP/IP (9100), TCP/IP MPv3(IPv6, HTTP); Scan Protocol: Twain for		

Footnotes

¹ Automatic two-sided printing is standard on the HP LaserJet MFP M438dn, M440dn, M438nda, and M440nda only. ² Reversing automatic document feeder is standard on the HP LaserJet MFP M438nda, M440nda, and M443nda only. Requires a separate purchase for the HP LaserJet MFP M439dn and M440dn. Installation from HP Authorized service provider only. ³ Not all HP Web Jetadmin features are supported on the HP LaserJet MFP M438 and M440. HP Web Jetadmin is available for download at no additional charge at http://www.hp.com/go/webjetadmin

Technical specifications disclaimers

In the provide as the maximum number of pages per month of imaged output be within the stated range for optimum device performance, based on factors including supplies and device life over an extended within the stated range for optimum device performance, based on factors including supplies and base priored and device life over an extended within the stated range for optimum device performance, based on factors including supplies and based on the maximum number of pages per month of imaged output be within the stated range for optimum device performance, based on factors including supplies and based on the product warranty. Power consumption the stated range for optimum device performance, based on factors including supplies replacement intervals and device.

¹ Device that the number of pages per month of imaged output be within the stated range for optimum device performance, based on factors including supplies replacement intervals and device life over an extended warranty.

warranty period. ⁶ Power requirements are based on the country/region where the printer is sold. Do not convert operating voltages. This will damage the printer and void the product warranty. Energy Star value typically based on measurement of ⁷ Windows 7 or higher

To learn more, visit http://www.hp.com

© Copyright 2020 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.